

# P & H Protective Plaster Systems (Pty) Ltd.

P.O. Box 11845  
Aston Manor, 1630  
41 Pomona Road  
Pomona, Kempton Park

Co. Reg. No. 79/00510.07  
www.phrocklite.co.za

*Schützen, Was Wichtig Ist*

Office: 011 979 3319  
011 979 2301  
011 396 2330  
Fax: 011 979 2931



## ROCKLITE® 'S' HINGED GLASS FIRE DOORS & FIXED WINDOWS

- ROCKLITE® 'S' glass fire doors are easy to install. They are manufactured in a wide range of sizes to match existing applications.
- ROCKLITE® 'S' fire doors are supplied with a purpose-made 3mm steel frame with a 20mm rebate including 2 bullet hinges per leaf. Frames are tubular frames and gets bolted onto existing wall openings.
- **6mm Schott PYRAN® S Borofloat Toughened Glass** for a 120 minute fire rating is used in all our Glass Fire Doors. Between the Glass & Steel Glazing Beads we include Intumex® LPSK Intumescent Strips.

### 6mm Toughened PYRAN® S Borofloat Glass – 30 to 120 minutes:

PYRAN® S is a superior fire resistant glass with a fire rating of up to 120 minutes if used in conjunction with a steel frame or door leaf.

PYRAN® S is manufactured using a micro-float process and outperforms soda lime glass. It allows for large formats and long fire resistance times due to its special physical properties. Furthermore, NiS crystals cannot form with Borosilicate glass. Borosilicate glass is the base material for the entire PYRAN® family of fire resistant glazing products. The standard PYRAN® design consists of a monolithic borosilicate glass, refined by thermal tempering and manufactured in a **Microfloat facility, the only one of its kind in the world.** This unique combination of **borosilicate glass and the float process** results in a specialized glass with outstanding characteristics.

Amongst the entire range of SCHOTT fire resistant products, PYRAN® S offers the greatest multi-functionality. PYRAN® S is a monolithic thermally tempered borosilicate safety glass according to DIN EN Standard 13024-1. PYRAN® S is a regulated building material and can be used for single or double glazing without conducting the heat soak test, giving it yet another advantage in terms of safety and dependability.

Even when exposed to severe heat, PYRAN® S glass remains transparent, this ensures lifesaving viewing making it safer in the event of an emergency evacuation.

**PYRAN® S characteristics include:**

- high transmission in the visible and ultraviolet spectral ranges
- brilliant optics, ensuring natural, pure colour reproduction

**PYRAN® S demonstrates extreme durability against:**

- aggressive environmental atmospheric attack
- exposure to UV radiation
- abrasive chemical solutions

Characteristics SCHOTT PYRAN® S	6 mm
Resistance to fire (EN 13501-2)	E30, E45, E60, E90, E120
Reaction to fire (EN 13501-1)	A1
External fire performance (EN 13501-5)	NPD
Bullet resistance (EN 1063)	NPD
Explosion resistance (EN 13541)	NPD
Burglar resistance (EN 356)	NPD
Pendulum body impact resistance (EN 12600)	1 (C) 1
Resistance against sudden temperature changes and temperature differentials (EN 13024-1)	300 K
Wind, snow, permanent and imposed load resistance (EN 13024-1)	6 mm
Direct airborne sound insulation (EN 12758)	31 (-2, -3) dB
Thermal properties (U <sub>g</sub> EN 673)	5,7 W / (m²K)
Radiation properties (EN 410): - light transmission and reflection - solar transmission and reflection	0,92 / 0,08 0,91 / 0,08
Dangerous substances	No dangerous substances

Amongst the entire range of SCHOTT fire resistant products, PYRAN® S offers the greatest multi-functionality. PYRAN® S is a monolithic thermally tempered borosilicate safety glass according to DIN EN Standard 13024-1.

Fire resistance classification	Framing material/system					
	Steel	Timber	Aluminium	Plasterboard construction system	Butt joint	Point-fixed
E 30	●	●	●	●	●	●
E 60	●	●		●	●	
E 90	●			●		
E 120	●					



## Fire Resistance Categories for Particular Protection Specifications:

According to EN Standard 13501-2, fire resistant glazing is classified using the following combinations of letters and numbers:

**E:** Provides a physical barrier against flames, hot gases and smoke.

**EI:** Provides a physical barrier against flames, hot gases and smoke as well as thermal isolation.

**EW:** Provides a physical barrier against flames, hot gases and smoke and reduces heat radiation.



*PYRAN® meets the requirements for the fire resistance category E. It provides a physical barrier against flames, hot gases and smoke.*

We have used the 6mm PYRAN® S Glass in various E60 & E120 Fire Doors. We also used PYRAN® S Glass with in Glass Fire Doors combining it with the following:

- 3.0 mm Mild Steel Frame
- 2.0 mm Mild Steel Door Leaves
- Bullet Hinges
- Intumescent strips between Glass & Glazing Beads
- Lorient HP1612BW Intumescent Fire, Smoke and Acoustic Seals on the inside rebate of the Frame
- Lorient LP4204TF Intumescent Fire, Smoke and Acoustic Seals on the bottoms of the Door Leaves.

## Fire Product Classification and Performance Definitions:

### Integrity

The ability of a specimen of a separating element to contain a fire to a specified criteria for collapse, freedom from holes, cracks and fissures, and sustained flaming on the unexposed face.

### Insulation

Is the ability of glazed screens or doors to limit the temperature rise on the non-fire side to an average of no more than 140°C and in any one position by no more than 180°C.

### Radiant Heat

The ability of the element of construction to reduce the probability of transmission of fire as a result of significant radiated heat, either through the element or from its unexposed surface to adjacent materials on the non-fire side.

### Classification

EN 13501-2: Fire classification of construction products and building elements.

Part 2: Classification using data from fire resistance tests, excluding ventilation services.

UK regulations have previously classified products in terms of integrity or integrity and insulation.

The European definitions will be as follows:

- E Integrity
- I Insulation
- W Radiation

Therefore, example classifications may become:

- E 30 = 30 minutes Integrity
- E 60 = 60 minutes Integrity
- E 120 = 120 minutes Integrity

You cannot classify an E120 fire door the same way as you would a Class A or B fire door – the glass available in South Africa has a lower fire rating than a Class A or B fire door. If, for any reason, the Class A or B fire door has a bigger viewing panel than the 100 x 300mm or 200mm Diameter allowed in SANS 1253:2003 (edition 3) the fire rating of the complete fire door unit will be downgraded to the fire rating of the glazing installed to or on top of (fanlight) the fire door.














**PLEASE ALWAYS ENSURE THAT YOU SELECT THE CORRECT HAND WHEN ORDERING:**

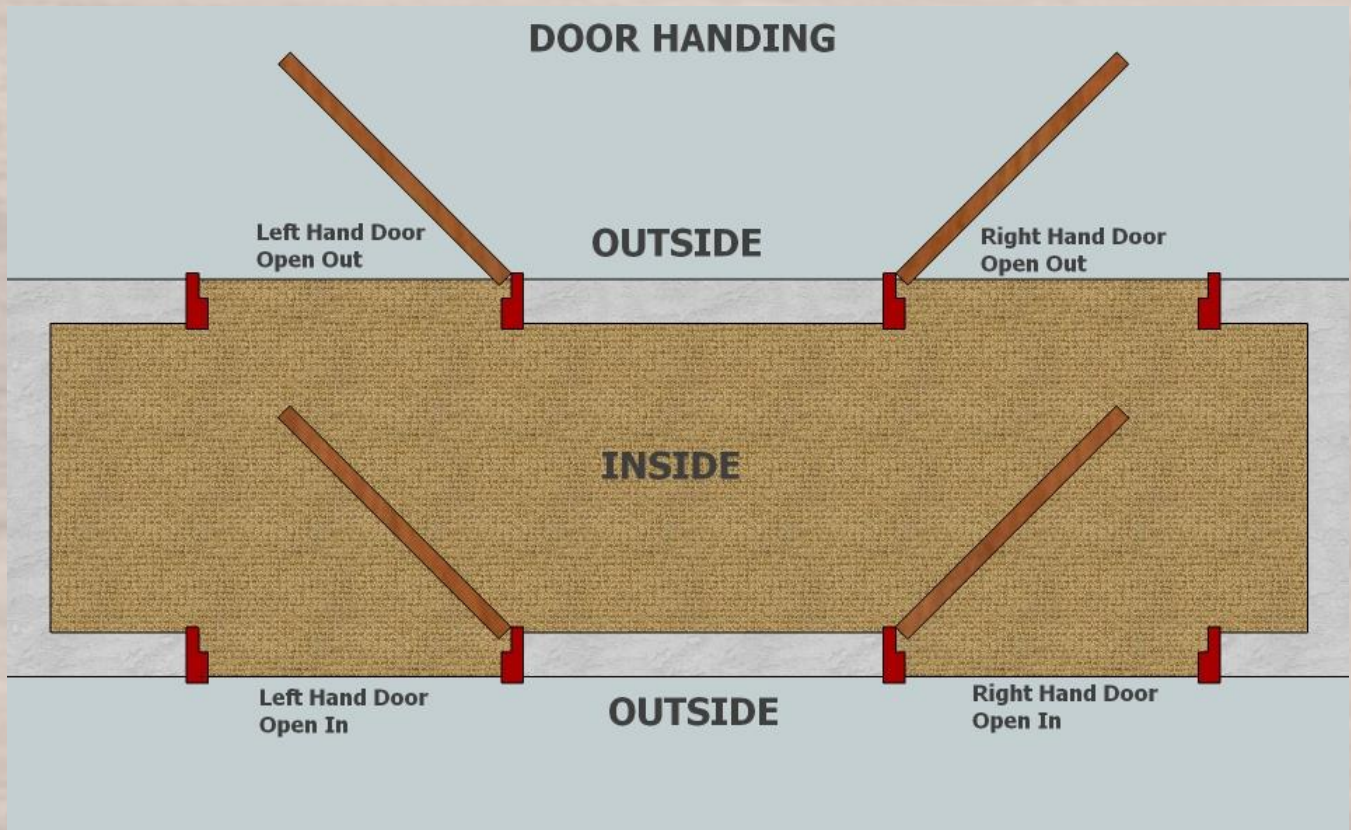

# GLASS FIRE DOOR FRAME:

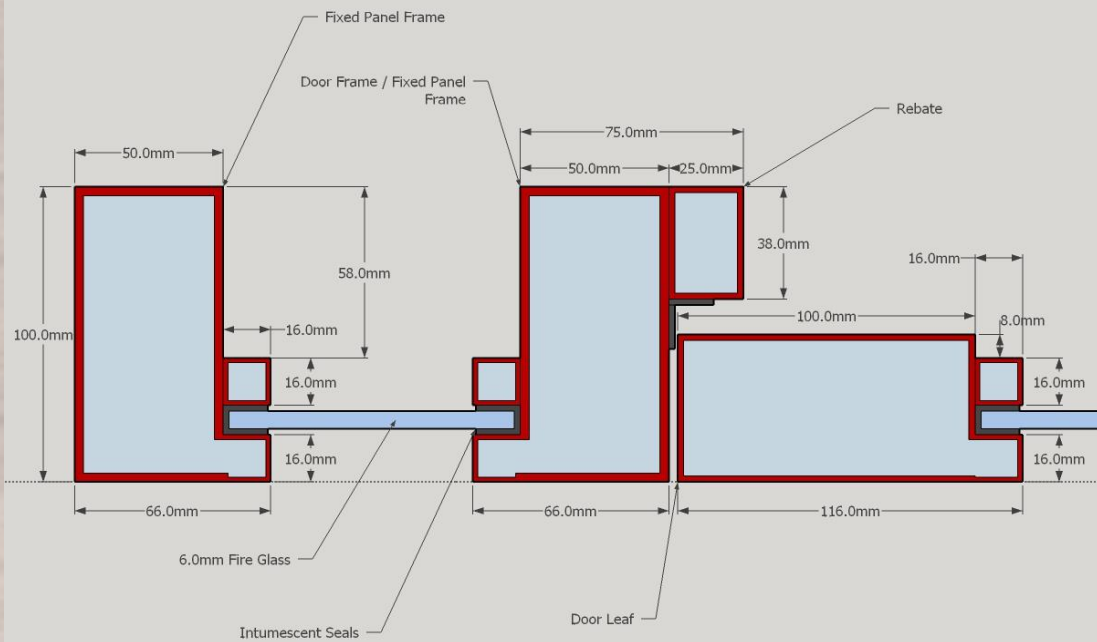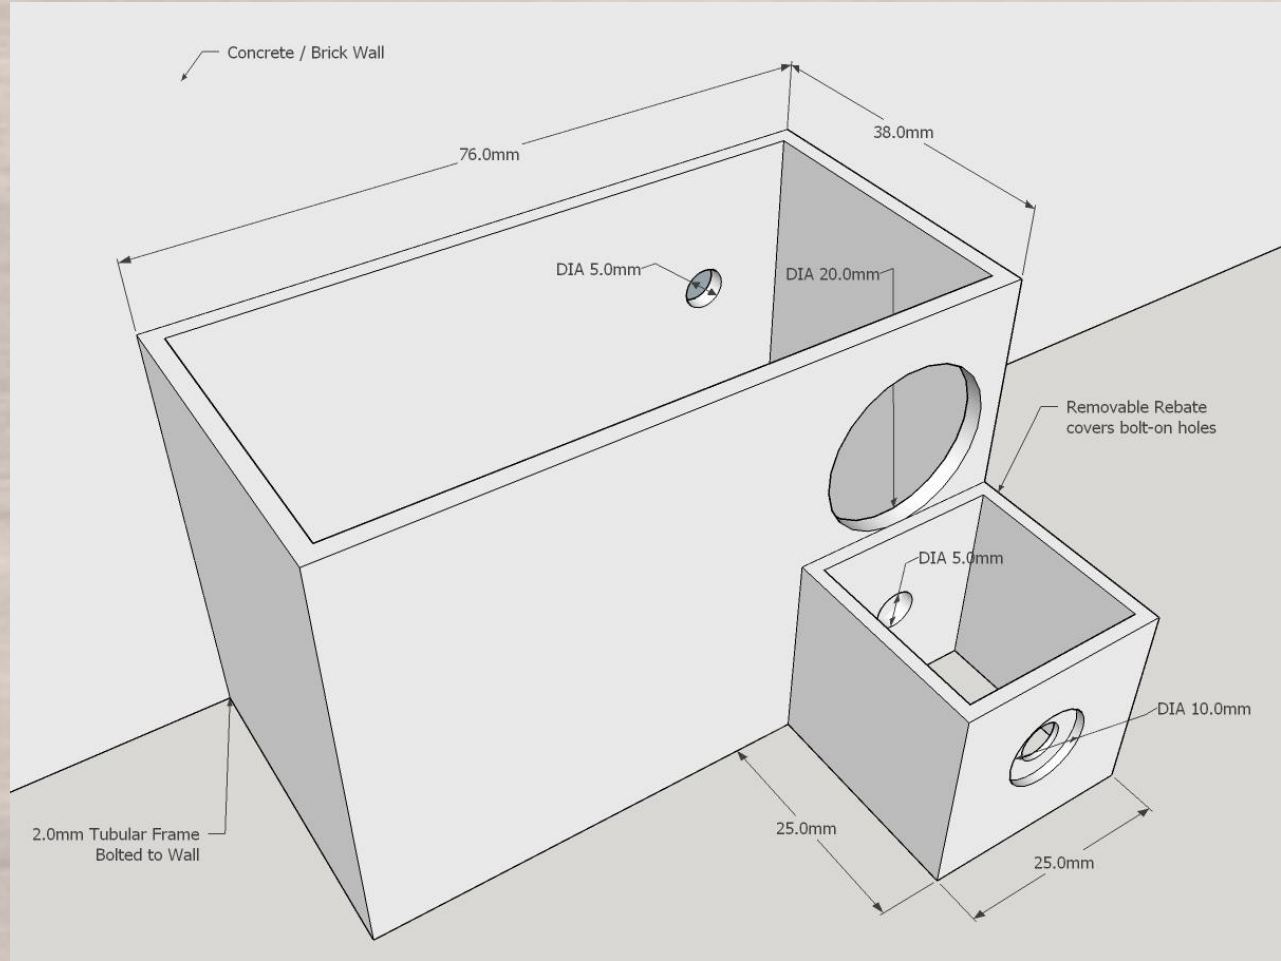

**P&H PROTECTIVE  
PLASTER SYSTEMS  
(PTY) LTD**

**PH**

Sandri Jooschell  
Tel: 011 979 3319 / 2301  
Fax: 011 979 2931  
41 Pomona Road  
Pomona, Kempton Park  
Email: sandri@p&h-protective.co.za  
www.p&hprotective.co.za

Typical Detail of Glass Fire Door & Silight / Fixed Panel





For more information on any of our products or services, please feel free to contact us:

Bernd Jonischkeit (Director / General Manager):	082 893 0777	<a href="mailto:bernd@phrocklite.co.za">bernd@phrocklite.co.za</a>
Rainer Jonischkeit (Director / Financial Manager):	082 886 5500	<a href="mailto:rainer@phrocklite.co.za">rainer@phrocklite.co.za</a>
Nicolas Jonischkeit (Safety Officer / Sales):	083 259 5126	<a href="mailto:nicolas@phrocklite.co.za">nicolas@phrocklite.co.za</a>
Bernedene Esterhuizen (Buyer/Sales):	084 999 5792	<a href="mailto:bernedene@phrocklite.co.za">bernedene@phrocklite.co.za</a>
Juan-Marc Cilliers (Sales):	063 285 0087	<a href="mailto:juanmarc@phrocklite.co.za">juanmarc@phrocklite.co.za</a>

[www.phrocklite.co.za](http://www.phrocklite.co.za)